
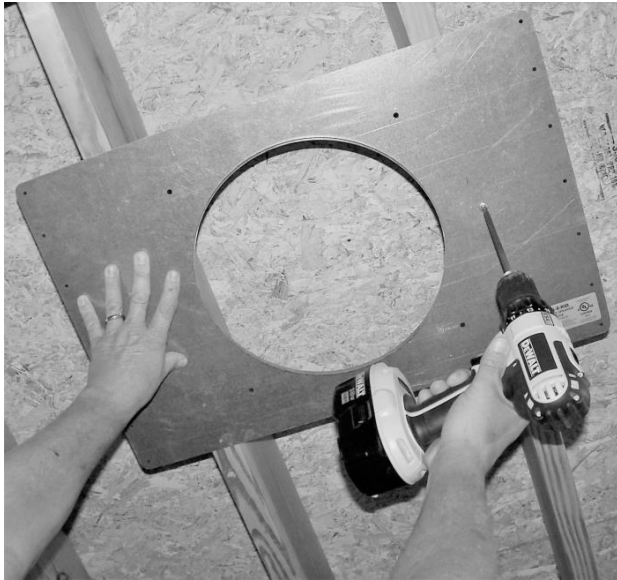


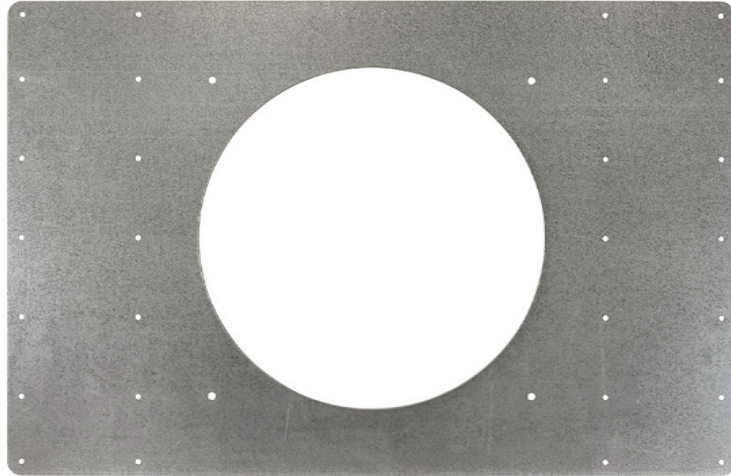

FEATURES

- Secure mounting for iC8 series loudspeakers
- 3/16" diameter mounting holes on 16" and 24" centers
- Galvanized Finish

APPLICATIONS

- Secure mounting of iC8 series loudspeakers in ceiling material not strong enough to support the weight of the speaker
- New construction installations before drywall has been installed

INSTALLATION

- Mount the bracket to the bottom of joists, rafters, trusses, metal rails, or other ceiling support structure as required to locate the speaker.
- Mount with the lip facing downward toward the floor.
- As applicable screws vary with construction and the ceiling structure **screws are not included and will be provided by the installer.**
- Drywall is installed over the bracket with the center lip used as a pre-cutting template or blind cutout guide.
- Leave a length of speaker cable above the bracket where it will be accessible after the ceiling has been installed.

